

Bid Specification

Video Monitoring and Documentation

Mobile TrailerCam Advanced GigapixelCam

Specification includes camera system and managed services



Daily Megapixel Panoramas



360° User Controllable



Installation and Maintenance



Quality Control and Maintenance



Multiple Preset Archiving



Full Service Support

Maintenance-free wiper to ensure clear images

Rugged UV and cut resistant spiral conduit for cable deployment

Heavy duty galvanized steel construction

Guy wires

Full size spare tire

Low maintenance AGM sealed battery

75 Amp battery charger



Current and Historical Weather Data



iOS and Android App



Website Development

User controllable ultra-precise 360° robotic Pan/Tilt/Zoom camera with multiple preset composition

Up to 1 Gigapixel (1000 megapixels) auto-generated panoramas

Live streaming video preview with weekly 1080p broadcast quality clip
3x optical zoom


Telescoping up to 42' galvanized steel mast with an electric extension

Custom branding to display your organization's logo

GPS 4G modem

Real-time remote data management

360° adjustable solar array

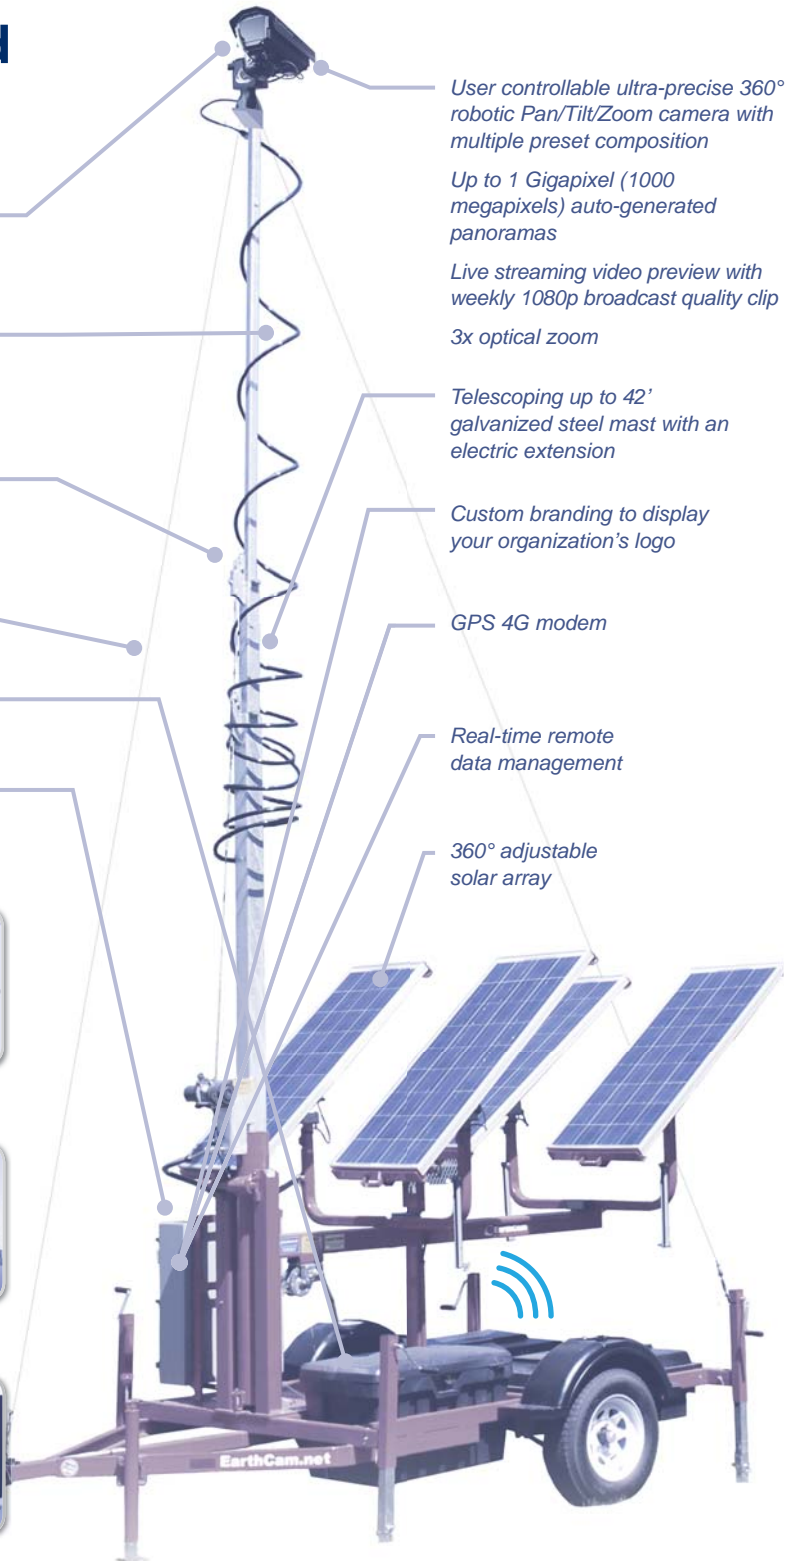

Additional services included



EarthCam.net
The Webcam Technology Experts

1-800-EARTHCAM
www.earthcam.net/contactus



01.32.36 Video Monitoring and Documentation Bid Specification

1. The Contractor shall provide a Robotic High Definition Megapixel Webcam for users to remotely view the project on a secure connection via a network connection. The camera will provide a full view of the work area on the construction site.

CONTACT SYSTEM VENDOR: EarthCam / Brian Cury +1 201.488.1111 Email: WWW.EARTHCAM.NET/CONTACTUS
2. The trailer camera system shall meet or exceed the following requirements:
 - 2.1 Dimensions: 15.5' L x 7.1' W x 7.2' H (4.57m L x 1.13m W x 2.2m H)
 - 2.2 Weight: 2800lbs (1270kg)
 - 2.3 Single torsion-type axle steel welded trailer with 2" adjustable ball hitch manual outriggers
 - 2.4 DOT approved lighting package to include brake and marker lights
 - 2.5 Solar powered and wireless
 - 2.6 Low maintenance 6Volt DC deep cycle AGM batteries, 75 Amp battery charger
 - 2.7 150 watt polycrystalline silicon photovoltaic solar modules
 - 2.8 Trailer mounted locking manual/motorized up to 42 foot telescoping mast with spiral conduit for cable deployment
 - 2.9 Full size spare tire
 - 2.10 Guy wires to stabilize an extended mast and steady camera shot
 - 2.11 Thermostatically controlled IP66/IP67 rated environmentally sealed black powder coated enclosure with stainless steel hardware
 - 2.12 User controlled window wiper
 - 2.13 Industrial grade solid state embedded Linux System
 - 2.14 24 Megapixels (6000 x 4000 pixels), Digital SLR camera with a 15.6mm x 23.6mm DX-Format CMOS Image Sensor
 - 2.15 Lens: F/3.5-F/5.6, 18mm-55mm, 3X Optical Zoom
 - 2.16 Professional photo grade glass enclosure window
 - 2.17 Nikon optics for superior image quality
 - 2.18 Auto Features: ISO, Shutter, White Balance and Focus
 - 2.19 Live streaming video preview with 1080p broadcast quality video clip capability
 - 2.20 Image sensor cleaning and airflow control system for dust reduction
 - 2.21 Anti-aliasing filter (Optical Low Pass Filter) for moiré effect reduction
 - 2.22 39-point wide area autofocus system
 - 2.23 Ultra-precise, Pan/Tilt robotic base designed to provide consistent imaging in all environments
 - 2.24 Pan/Tilt: Pan Range 360° Continuous Pan, Tilt: +30° to -90° from level. Motor Type: Stepper
 - 2.25 Up to 1 Gigapixel (1000 megapixels) auto-generated multilayer 360° panoramas
 - 2.26 Communications: 10base-T/100base-TX Ethernet, IP Addressing: Dynamic or Static
 - 2.27 Wireless GPS 4G modem LTE
 - 2.28 Smart diagnostic LED multi-color power indicator lamp
 - 2.29 16GB On-Board Data Backup to provide a minimum of thirty days of on-board image retention
 - 2.30 Custom branding to display company logo
 - 2.31 Designed for EarthCam Control Center
3. Internet Based Online Interface: The camera will be accessible via an internet based Software as a Service (SaaS) solution. This online interface will be managed and supported by the System Vendor. The service will be available for the term of the project and allow the viewing of live video and High Definition digital still images captured and stored of the project on both mobile and desktop platforms.

The Internet Based Online Interface shall include the following features:
 - 3.1 Responsive HTML5 design for cross-platform access on desktop and mobile devices
 - 3.2 Secure HTTPS compliant with live stream secured & encrypted via https transport
 - 3.3 Display project name and logo
 - 3.4 Project Dashboard allows easy navigation between multiple cameras and projects
 - 3.5 Security interface offers flexible multi-view camera grid selective up to 9 cameras per screen streaming simultaneously
 - 3.6 Real-time live video viewing
 - 3.7 User-controllable Robotic Pan, Tilt and Zoom
 - 3.8 User-controllable settings for creating and editing multiple preset compositions
 - 3.9 Daily auto-generated 360° multilayer panoramas up to 1 Gigapixel (1000 megapixels)
 - 3.10 Onscreen control button for wiper and washer control to allow for remote cleaning of the viewing window
 - 3.11 Picture in picture capability for viewing live video and High Definition Megapixel images simultaneously
 - 3.12 Digital Pan, Tilt and Zoom capability within a High Definition images
 - 3.13 Custom tiling player to easily view High Definition panoramic images
 - 3.14 Instant live snapshot capability in addition to preset scheduled archives
 - 3.15 HDR (High Dynamic Range) imaging and additional special effects
 - 3.16 Visual timeline with quick thumbnail view allows image navigation by year, month, day and hour
 - 3.17 Multifunction Image Browsing
 - 3.18 Time-lapse feature with optional time date overlay for instant time-lapse viewing, downloading and embedding
 - 3.19 Full Screen Mode for displaying complete image without any graphical frame
 - 3.20 Photo Filters and Graphical Markup Tools for detailing and creating notes with graphical overlays on images, including project title, logo and time date stamp
 - 3.21 Image Comparison Tool for comparing two images taken at different times, overlaid on top of each other
 - 3.22 Share Image Tool for saving, printing, emailing and posting to Hall of Fame
 - 3.23 Project Management Software integration (Aconex, Autodesk BIM 360, PlanGrid, Procore, SharePoint)
 - 3.24 Posting and sharing camera images with notes
 - 3.25 Social Media Integration Tools for sharing project images and notes on Facebook and Twitter
 - 3.26 Automatically generated daily/weekly project progress update email with camera image and weather
 - 3.27 Graphical Weather applet displaying local weather data with satellite and updating radar imaging
 - 3.28 Integration of maps, aerial and satellite imagery
 - 3.29 Graphical Data Management Tools showing archived and current system status of solar amperage, battery power remaining, wireless radio connectivity and device location
 - 3.30 Automatically generated Progress Reports (in PDF and PowerPoint formats) using weekly camera images with associated weather data, notes, and client logo
4. Access to account protected by Account Security feature which includes four levels of password protection, IP address block/permission and SSL protection of user login password.
5. The system shall capture and upload images every 15 minutes, 24 hours per day.
6. The system shall have M2M – Machine to Machine 24/7 Support with active self-healing technology and automatic software upgrades to maintain the quality, consistency and reliability of all images.
7. Images will be maintained on the System Vendor's servers for reference available at all times during the life of the project and for no less than 60 days after completion. All images will be protected on servers owned and operated by the System Vendor and located in a secure area at the System Vendor's location.
8. The Contractor shall provide all service and maintenance, including cleaning, of the camera system throughout the life of the project including making appropriate arrangements for camera to remain in operation up to and through finalization of all structural, landscaping and "completed state" condition necessary for beginning-to-end time-lapse record.
9. The System Vendor shall provide custom public website development. Website shall be separate from the Online Interface, match the look and colors of the project's website, and be delivered as embed code or standalone web page. Additional features include Facebook and Twitter integration, full screen mode, image comparison, weather, multiple logos, graphical background image and project description.
10. The System Vendor at the end of the project shall provide a comprehensive archive package that includes all images, historical weather data, computer-generated time-lapse movies and a royalty-free web-based viewer software. The software shall include the same interactive interface as the live camera during the project.
11. The System Vendor shall provide time-lapse movie(s) at the end of the project. Time-lapses shall be professionally edited by a video editor using image stabilization software. The movie will start with a graphic, incorporating project title, date and logo. Periods of bad weather or inactivity shall be removed to produce a compelling and consistent movie. A machine edited movie will not be acceptable.
12. The Contractor shall secure a nearby space to deploy the trailer as per System Vendor's instruction. The Contractor shall supply all equipment required for safe and secure access to the camera location for technicians performing installation and maintenance services, including lane closures, bucket truck and/or lift. The System Vendor will consult on and provide recommendations for optimal camera placement and provide professional installation services as required.